



No improvisation
on safety!

Emergency Lighting

Standard, self-testing and connected luminaires



se.com


Life Is On

Schneider
Electric

An escalation on innovation

Exiway Light Activa-link with Facility Expert Small Business (FESB) allows you to:

- View the status of each luminaire.
- Receive notification in real time in case of any fault (battery, wrong installation etc.).
- Access to remote monitoring and reporting tools of your Emergency Lighting system.
- Future add-on of other devices, like energy and temperature sensors, in the same Facility Expert SB system, that help to monitor all your critical equipment from the same App.

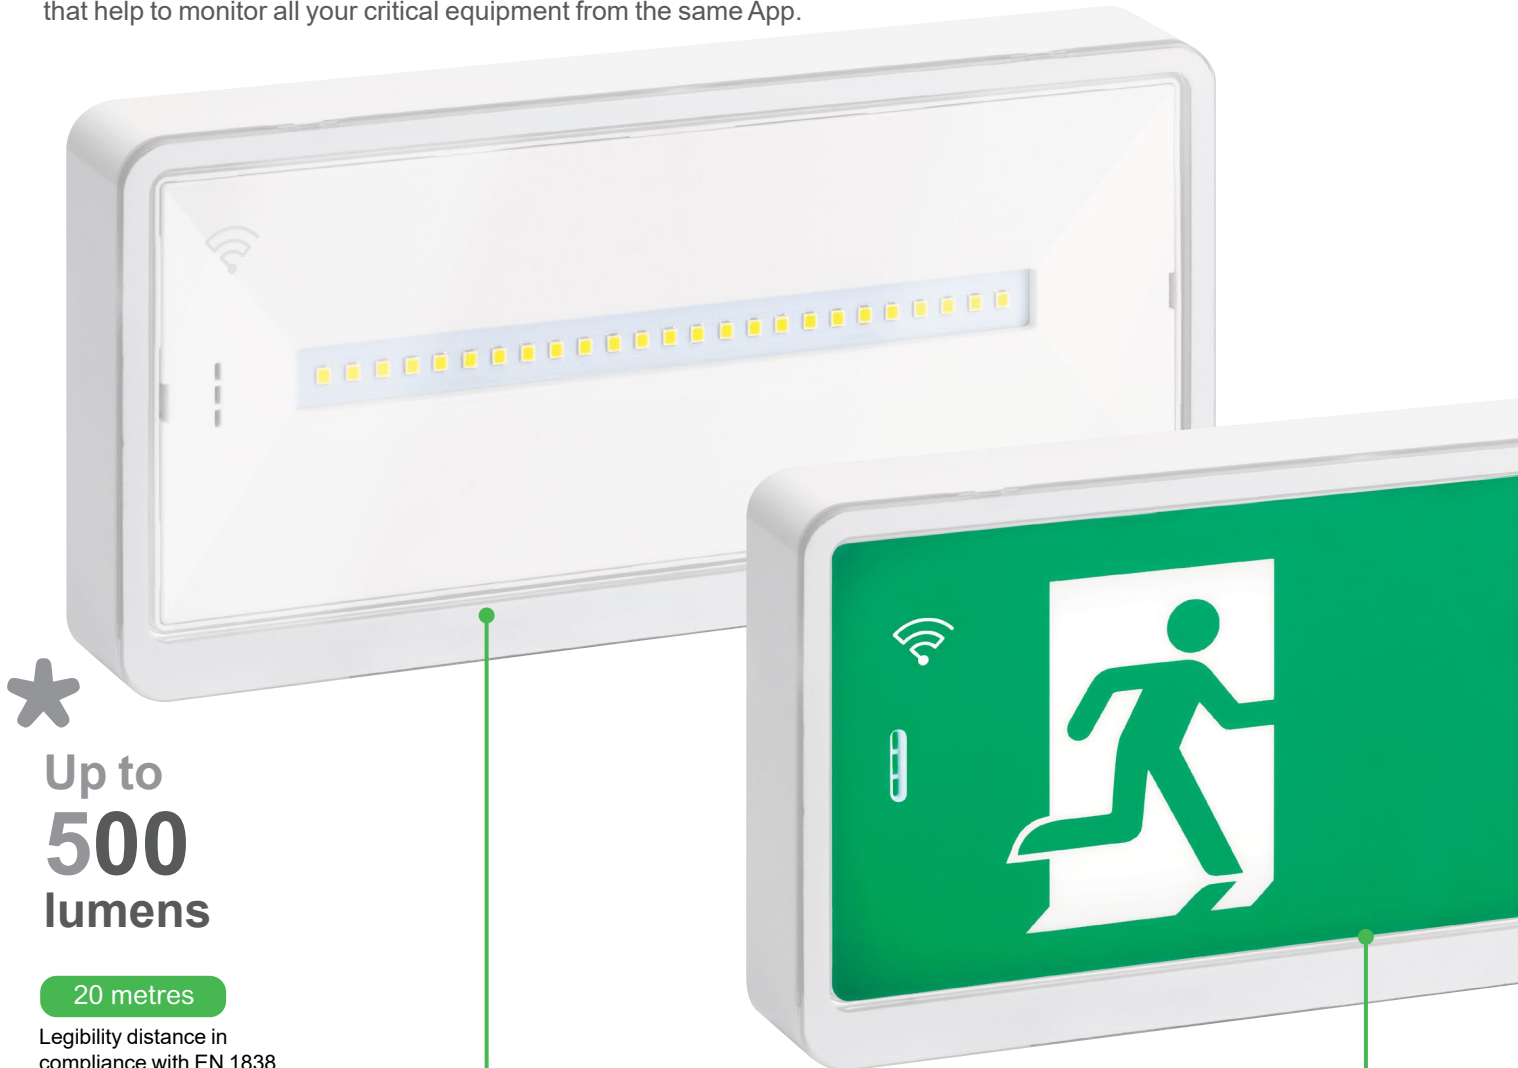


Up to
500
lumens

20 metres

Legibility distance in compliance with EN 1838

1. Each detail has been optimised

P148660

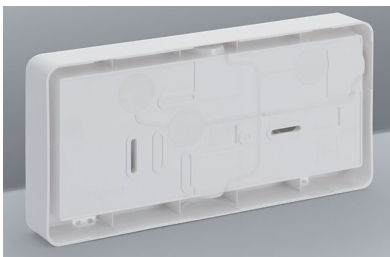

With easy-to-drill and pre-cut holes and 16 mm Ø tube inlet.

2. Choose your light level

P148660



Maintained/not-maintained function, M/SA maintained mode (always ON), NM/SE not-maintained mode (only emergency), selection can be done from jumper.

P148677



3 models cover 15 different performances. Autonomy can be selected: standard autonomy is 1 hour, but can be increased to 1.5, 2 or 3 hours depending on the project specifications.

3. Discrete and aesthetic design



Small and nicely shaped, perfect legibility.

4. Dedicated accessories



Removable pictograms with Led lens to be positioned under the transparent cover glass.

Led lens improve legibility of pictogram panels (EN1838)

Transparent cover glass hold internally the removable pictograms panels.

5. Fast installation



5 bi-material entry cables

Design optimized to improve easiness of installation.
Rubber entry cables IP65 certified.



Pre-cutted frame

For upper and lateral entry cable



Detachable connector easy to handle for Standard and Activa versions.
Screwless connector for Activa-link models for an even faster and more reliable installation.




Quick fastener coupling reflector

6 Easy to transform




The light fitting can be transformed easily, only 3 pictograms for all the signs

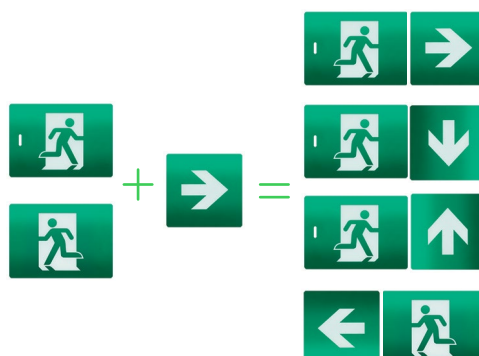

Exiway Light

IP42 / 65, IK09

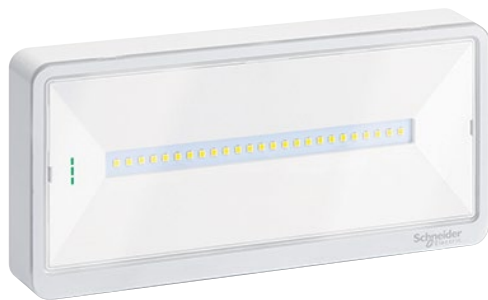

CE




Technical specifications

- Standard version, available for maintained (M/SA) or not-maintained (N.M/SE) operation by setting a jumper.
- Self-testing version (Activa and Activa-link), available for maintained (M/SA) or not-maintained (N.M/SE) operation by setting a jumper or using external switch.
- Selectable duration: 1 h, 1.5 h, 2 h or 3 h by jumper.
- Installation: quick mounting on wall or ceiling.
- Compliant with EN 60598-2-22, EN 62034, EN 62471 - group 0 standards.
- Compliant with RED 2014/53/UE (Activa-link).
- Protection rating: IP42 / 65, IK09.
- Insulation class: II
- Operating temperature: 0...40°C.
- Fire behaviour (EN 60695-2-10), incandescent wire: 850°C.
- Case of self-extinguishing polycarbonate 94V-2 (UL 94).
- Light source: long-lasting LED light source (> 10 years expected in typical ambient temperature* condition).
- Power supply: 230 V, 50/60 Hz.
- Complete recharge: 12 h for all products.
- Exiway Light Activa-link is compatible with the PowerTag Link C+ (ref. **A9XELC10**).

(*) Typical environment temperature: 25°C.

Dimensions(mm)

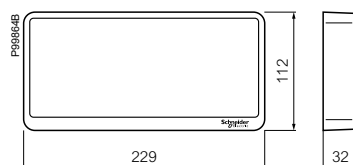

Installation methods



Quick mounting



Wall
(installation without accessories)



Flag
Bracket for flag installation
(Ref. **OVA53226**)



Ceiling
(installation without accessories)



Ceiling
Bracket for ceiling installation
(Ref. **OVA53227**)

Accessory catalogue numbers

	Compatibility	Dimensions (mm) height x width x depth	Cat. no.
Exit sign kit (set of 3) Visibility 20 m P148885 	All	90 x 134 x 0.25	OVA53214
Opaline cover glass P148886 	All	112 x 229 x 2	OVA53215
Led lens P148887 	All	14 x 168 x 4	OVA53216
Protective grids IK10 P98688 	All	178 x 296 x 73	OVA59824
Bracket for flag installation 	All	-	OVA53226
Bracket for ceiling installation 	All	-	OVA53227

Spare parts catalogue numbers

	Description	Compatibility	Cat. no.
Batteries (LiFePO4) P147381 	3.2 V, 0.57 Ah	OVA44010, OVA44011, OVA44110, OVA44111, OVA44210, OVA44211	OVA51170
	3.2 V, 1.5 Ah	OVA44012, OVA44013, OVA44112, OVA44113, OVA44212, OVA44213	OVA51168
	6.4 V, 1.5 Ah	OVA44014, OVA44015, OVA44114, OVA44115, OVA44214, OVA44215	OVA51172

PowerTag Link C+

For the connection of Exiway Light Activa-link to the APP Facility Expert Small Business.





A9XELC10

Design

Emergency light fittings spacing table

Exiway Light (Standard, Activa and Activa-link)





A and E: Transverse spacing to wall
B and F: Transverse spacing between luminaires
C and G: Axial spacing to wall
D and H: Axial spacing between luminaires

Catalog number	Installation height for ceiling mounting	Lux level directly under luminaires	Escape routes 1 Lux min. Along centre line				Area covered to obtain more than 1 Lux on the ground	Open (Anti-Panic) areas 0.5 Lux min. Luminaires arranged in a regular array				Area covered to obtain 0.5 Lux on the ground
Autonomy 1 h			A	B	C	D		E	F	G	H	
	(m)	(lux)	(m)				(m²)	(m)				(m²)
OVA44010	2.00	9.72	2.94	7.11	2.83	7.07	26.18	3.02	7.25	2.93	6.99	38.38
OVA44011	2.50	6.22	3.09	7.81	2.98	7.74	27.89	3.27	8.11	3.17	7.75	46.95
OVA44110	3.00	4.32	3.16	8.26	3.08	8.22	31.46	3.43	8.75	3.36	8.39	53.55
OVA44111	3.50	3.17	3.15	8.57	3.07	8.49	29.16	3.51	9.42	3.44	9.14	56.49
OVA44210	4.00	2.43	3.07	8.77	2.99	8.73	28.56	3.60	10.03	3.52	9.56	61.88
OVA44211	5.00	1.56	2.55	8.81	2.47	8.73	22.31	3.62	10.84	3.52	10.36	59.50
	6.00	1.08	0.95	8.36	0.82	8.29	0.00	3.63	11.25	3.19	10.86	50.88
OVA44012	2.00	22.09	3.80	8.69	3.65	8.88	43.14	3.67	8.25	3.54	8.48	61.88
OVA44013	2.50	14.14	4.12	9.88	4.00	9.87	52.07	3.98	9.79	3.88	9.69	76.70
OVA44112	3.00	9.82	4.41	10.72	4.28	10.66	58.91	4.26	10.90	4.16	10.43	87.69
OVA44113	3.50	7.21	4.60	11.37	4.44	11.31	63.78	4.53	11.83	4.39	11.34	102.05
OVA44212	4.00	5.52	4.73	12.03	4.56	11.92	61.88	4.77	12.50	4.62	11.89	107.11
OVA44213	5.00	3.54	4.79	12.80	4.66	12.63	59.50	5.00	13.90	4.89	13.40	128.31
	6.00	2.45	4.65	13.21	4.48	13.10	64.26	5.21	14.98	5.05	14.47	139.24
	7.00	1.80	4.21	13.34	4.08	13.29	58.31	5.23	15.94	5.09	15.28	123.92
	8.00	1.38	3.44	13.13	3.27	13.01	19.04	5.19	16.60	4.97	15.92	152.33
	9.00	1.09	1.71	12.66	1.55	12.55	0.00	5.09	17.06	4.65	16.52	120.50
OVA44014	2.00	44.31	4.49	9.67	4.44	10.56	61.88	4.25	8.50	4.21	9.56	83.90
OVA44015	2.50	28.36	5.13	11.30	4.91	11.85	76.70	4.75	10.40	4.57	11.16	110.64
OVA44114	3.00	19.69	5.53	12.73	5.30	12.94	89.70	5.14	11.90	4.95	12.41	133.21
OVA44115	3.50	14.47	5.83	13.97	5.66	13.96	102.96	5.43	13.48	5.29	13.55	152.16
OVA44214	4.00	11.08	6.10	14.82	5.93	14.81	107.11	5.73	14.75	5.58	14.48	173.75
OVA44215	5.00	7.09	6.52	16.24	6.34	16.08	130.17	6.23	16.83	6.08	16.01	208.26
	6.00	4.92	6.78	17.30	6.55	17.22	139.24	6.66	18.24	6.45	17.41	235.64
	7.00	3.62	6.82	18.08	6.58	17.92	127.56	6.89	19.48	6.67	18.81	258.77
	8.00	2.77	6.71	18.65	6.48	18.41	152.33	7.06	20.74	6.83	20.06	252.30
	9.00	2.19	6.42	18.97	6.19	18.72	120.50	7.15	21.86	6.91	20.97	289.19
	10.00	1.77	5.95	18.98	5.66	18.81	104.13	7.20	22.48	6.87	21.78	238.02
Autonomy 1.5 h			A	B	C	D		E	F	G	H	
	(m)	(lux)	(m)				(m²)	(m)				(m²)
OVA44010	2.00	7.92	2.70	6.69	2.63	6.66	22.61	2.89	6.95	2.82	6.70	35.11
OVA44011	2.50	5.07	2.83	7.28	2.75	7.28	24.17	3.11	7.62	3.04	7.36	40.91
OVA44110	3.00	3.52	2.87	7.68	2.80	7.65	21.42	3.23	8.18	3.16	8.00	45.52
OVA44111	3.50	2.59	2.78	7.91	2.73	7.88	22.78	3.27	8.96	3.22	8.69	47.38
OVA44210	4.00	1.98	2.60	8.04	2.52	7.97	19.04	3.34	9.41	3.26	9.06	52.36
OVA44211	5.00	1.27	1.80	7.78	1.72	7.74	7.44	3.27	10.17	3.16	9.80	44.63
OVA44012	2.00	17.60	3.46	8.39	3.40	8.43	36.00	3.49	8.14	3.44	8.25	54.74
OVA44013	2.50	11.27	3.81	9.31	3.74	9.26	42.30	3.79	9.42	3.72	9.32	68.80
OVA44112	3.00	7.82	4.05	9.99	3.95	9.94	50.88	4.04	10.31	3.95	9.98	78.99
OVA44113	3.50	5.75	4.17	10.63	4.06	10.58	49.20	4.29	10.99	4.19	10.55	83.83
OVA44212	4.00	4.40	4.25	11.11	4.14	11.06	59.50	4.44	11.72	4.34	11.39	95.21
OVA44213	5.00	2.82	4.16	11.71	4.12	11.66	59.50	4.59	13.03	4.55	12.68	98.55
	6.00	1.96	3.86	11.95	3.75	11.90	42.84	4.73	14.07	4.61	13.59	117.82
	7.00	1.44	3.19	11.75	3.08	11.70	43.74	4.65	14.81	4.51	14.32	116.63
	8.00	1.10	1.66	11.31	1.52	11.20	9.52	4.64	15.38	4.28	14.88	99.97
OVA44014	2.00	35.09	4.19	9.37	4.10	10.03	54.15	4.04	8.51	3.96	9.51	75.87
OVA44015	2.50	22.46	4.70	10.91	4.51	11.24	67.87	4.51	10.15	4.34	10.71	97.62
OVA44114	3.00	15.60	5.04	12.10	4.90	12.17	78.32	4.82	11.53	4.69	11.85	115.14
OVA44115	3.50	11.46	5.39	13.10	5.19	13.03	83.83	5.14	12.98	4.97	12.88	135.76
OVA44214	4.00	8.77	5.66	13.86	5.46	13.72	97.59	5.44	14.11	5.26	13.70	144.00
OVA44215	5.00	5.61	5.91	15.11	5.75	15.04	100.41	5.86	15.66	5.72	14.92	171.07
	6.00	3.90	6.05	16.07	5.84	15.93	117.82	6.18	17.09	5.98	16.49	203.50
	7.00	2.86	5.98	16.54	5.77	16.47	116.63	6.35	18.47	6.14	17.68	207.74
	8.00	2.19	5.76	16.86	5.55	16.79	104.73	6.47	19.52	6.25	18.71	233.26
	9.00	1.73	5.20	16.93	4.99	16.79	72.30	6.50	20.25	6.26	19.61	192.79
	10.00	1.40	4.45	16.71	4.24	16.56	59.50	6.41	21.05	6.14	20.40	238.02

Design (cont.)

Emergency light fittings spacing table

Exiway Light (Standard, Activa and Activa-link)



A and E: Transverse spacing to wall
B and F: Transverse spacing between luminaires
C and G: Axial spacing to wall
D and H: Axial spacing between luminaires

Catalog number	Installation height for ceiling mounting	Lux level directly under luminaires	Escape routes 1 Lux min. Along centre line				Area covered to obtain more than 1 Lux on the ground	Open (Anti-Panic) areas 0.5 Lux min. Luminaires arranged in a regular array				Area covered to obtain 0.5 Lux on the ground
			A	B	C	D		E	F	G	H	
Autonomy 2 h	(m)	(lux)	(m)				(m²)	(m)				(m²)
OVA44010	2.00	6.20	2.45	6.19	2.36	6.16	17.85	2.72	6.39	2.64	6.02	29.75
OVA44011	2.50	3.97	2.54	6.70	2.46	6.61	20.45	2.89	7.09	2.80	6.78	35.33
OVA44110	3.00	2.75	2.45	6.93	2.41	6.84	21.42	2.94	7.72	2.90	7.41	34.81
OVA44210	3.50	2.02	2.32	7.09	2.25	7.03	14.58	3.01	8.30	2.94	7.90	40.09
OVA44211	4.00	1.55	1.95	7.02	1.93	6.99	14.28	2.95	8.63	2.92	8.23	38.08
OVA44012	2.00	13.28	3.20	7.77	3.11	7.73	33.32	3.26	7.80	3.18	7.70	47.60
OVA44013	2.50	8.50	3.47	8.49	3.35	8.40	37.19	3.53	8.82	3.42	8.53	55.79
OVA44112	3.00	5.90	3.61	9.20	3.48	9.07	38.16	3.79	9.42	3.68	9.03	62.26
OVA44113	3.50	4.34	3.69	9.72	3.59	9.59	42.82	3.95	10.08	3.86	9.68	72.89
OVA44212	4.00	3.32	3.70	9.97	3.60	9.84	38.08	4.01	10.83	3.92	10.42	76.17
OVA44213	5.00	2.12	3.44	10.36	3.34	10.27	29.75	4.18	11.92	4.08	11.40	85.54
	6.00	1.48	2.73	10.16	2.70	10.20	32.13	4.08	12.71	4.04	12.16	85.69
	7.00	1.08	0.95	9.71	0.80	9.67	0.00	4.19	13.23	3.59	12.79	69.25
OVA44014	2.00	26.44	3.88	8.93	3.80	9.37	47.31	3.83	8.10	3.76	8.90	66.94
OVA44015	2.50	16.92	4.29	10.25	4.16	10.37	55.79	4.22	9.72	4.11	10.11	82.75
OVA44114	3.00	11.75	4.62	11.28	4.49	11.23	62.93	4.50	11.13	4.39	11.16	99.07
OVA44115	3.50	8.63	4.86	12.00	4.77	11.95	72.89	4.78	12.08	4.70	11.98	109.34
OVA44214	4.00	6.61	5.03	12.74	4.94	12.62	77.36	5.02	13.08	4.94	12.70	133.29
OVA44215	5.00	4.23	5.22	13.76	5.09	13.64	83.68	5.38	14.55	5.26	14.02	148.76
	6.00	2.94	5.17	14.30	5.03	14.18	85.69	5.53	15.93	5.40	15.38	155.31
	7.00	2.16	4.90	14.63	4.77	14.50	72.89	5.70	16.75	5.55	16.35	174.94
	8.00	1.65	4.34	14.66	4.21	14.47	57.12	5.67	17.69	5.51	17.28	152.33
	9.00	1.31	3.41	14.32	3.28	14.19	24.10	5.62	18.30	5.42	17.88	156.64
	10.00	1.06	0.79	13.75	0.79	13.68	0.00	5.27	19.07	5.27	18.48	119.01
Autonomy 3 h	(m)	(lux)	(m)				(m²)	(m)				(m²)
OVA44010	2.00	4.43	2.13	5.56	2.07	5.53	14.58	2.47	5.77	2.42	5.50	24.10
OVA44011	2.50	2.84	2.12	5.83	2.04	5.75	14.88	2.57	6.56	2.50	6.34	24.17
OVA44110	3.00	1.97	1.97	5.97	1.89	5.95	10.71	2.62	7.03	2.54	6.75	29.45
OVA44210	3.50	1.45	1.54	5.90	1.50	5.85	7.29	2.56	7.38	2.52	7.03	29.16
OVA44211	4.00	1.11	0.83	5.65	0.62	5.63	1.19	2.75	7.43	2.17	7.14	24.99
OVA44012	2.00	10.64	2.99	7.26	2.91	7.25	26.18	3.09	7.46	3.02	7.19	41.36
OVA44013	2.50	6.81	3.17	7.96	3.09	7.89	30.22	3.34	8.22	3.26	7.85	52.07
OVA44112	3.00	4.73	3.27	8.53	3.19	8.45	34.81	3.54	8.86	3.46	8.50	57.57
OVA44113	3.50	3.47	3.32	8.84	3.21	8.76	29.16	3.64	9.63	3.53	9.35	60.14
OVA44212	4.00	2.66	3.24	9.08	3.15	9.00	32.13	3.71	10.31	3.63	9.92	61.88
OVA44213	5.00	1.70	2.80	9.25	2.69	9.16	22.31	3.78	11.07	3.64	10.67	59.50
	6.00	1.18	1.75	8.88	1.72	8.84	10.71	3.61	11.89	3.56	11.48	64.26
OVA44014	2.00	22.24	3.72	0.91	3.54	0.97	42.55	3.65	8.35	3.49	8.58	61.88
OVA44015	2.50	14.23	4.12	0.90	3.89	0.99	52.53	3.99	9.68	3.80	9.58	75.77
OVA44114	3.00	9.88	4.41	0.91	4.17	1.01	58.24	4.28	10.78	4.07	10.32	89.03
OVA44115	3.50	7.26	4.60	0.92	4.36	1.00	64.69	4.53	11.75	4.32	11.15	104.78
OVA44214	4.00	5.56	4.73	0.92	4.48	1.01	64.26	4.76	12.39	4.54	11.67	109.49
OVA44215	5.00	3.56	4.83	0.94	4.58	1.01	59.50	5.02	13.86	4.79	12.97	130.17
	6.00	2.47	4.65	0.96	4.44	1.00	64.26	5.15	15.05	4.95	14.13	139.24
	7.00	1.82	4.21	0.98	3.96	1.00	54.67	5.25	15.96	4.97	15.02	131.21
	8.00	1.39	3.40	1.00	3.15	1.00	19.04	5.16	16.72	4.83	15.76	142.81
	9.00	1.10	1.67	1.00	1.39	1.00	0.00	5.21	17.40	4.41	16.56	120.50

OVA4401●

OVA44010	13
OVA44011	13
OVA44012	13
OVA44013	13
OVA44014	13
OVA44015	13

OVA4411●

OVA44110	13
OVA44111	13
OVA44112	13
OVA44113	13
OVA44114	13
OVA44115	13

OVA4421●

OVA44210	13
OVA44211	13
OVA44212	13
OVA44213	13
OVA44214	13
OVA44215	13

OVA5321●

OVA53214	14
OVA53215	14
OVA53216	14

OVA598●●

OVA59824	14
----------	----

OVA511●●

OVA51170	14
OVA51168	14
OVA51172	14



Schneider Electric Industries SAS

35, rue Joseph Monier
CS 30323
92506 Rueil Malmaison Cedex
France

RCS Nanterre 954 503 439
Capital social 896 313 776 €
www.se.com

09-2021
LSB03200EN-03

©2021 - Schneider Electric. All Rights Reserved.
All trademarks are owned by Schneider Electric Industries SAS or its affiliated companies.

This document has been
printed on recycled paper

